



BALLMOWER 2.0

Assembly and Operating Instructions

Enclosed: 1 PLAYMATE BALLMOWER 2.0
1 BALLMOWER handle
1 metal basket
4 handle mounting bolts
4 handle mounting lock nuts

Mounting the Handle:

1. Mount the handle to your PLAYMATE BALLMOWER 2.0 by inserting the handle into the mounting slots on either side of the chassis.



NOTE: Align the Basket Cradle towards the front of the BALLMOWER 2.0.



2. Insert the handle mounting bolts and connect a lock nut on each bolt.




Rotate the wheel to align one of the spokes with the handle slot.





3. Tighten the lower bolt and lock nut with a open end 7/16" wrench and a 7/16" ratchet wrench. On the upper bolt and lock nut, use an open end 7/16" wrench and a 7/16" ratchet wrench with an extension.

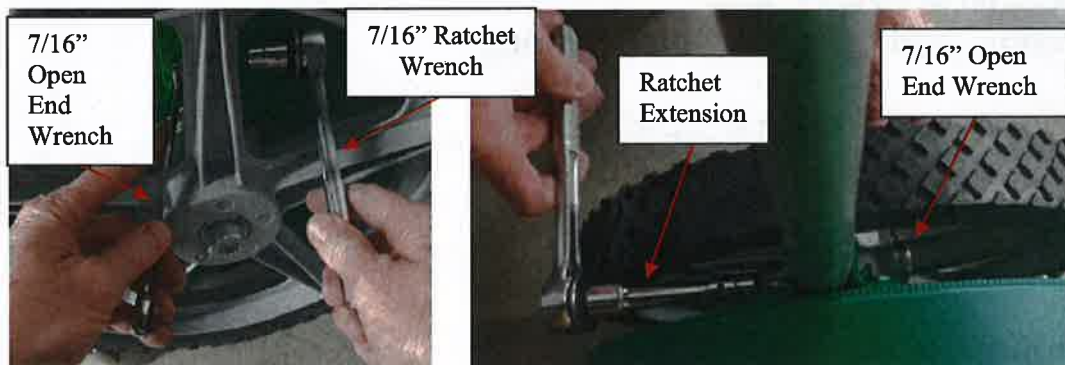

Operating the Arms:

1. Unlock one arm of the PLAYMATE BALLMOWER 2.0 by pushing in the fluted knob, located on the arm bracket. Hold down the knob when first moving the arm, then release and continue to expand the arms to their full width (approximately 45 degrees).
***Note: When arm is fully extended, the knob will lock the arm in place.**
2. Repeat same procedure with other BALLMOWER 2.0 arm.
3. For compact storage of your PLAYMATE BALLMOWER 2.0, close arms to the original position. Push the knob down to release the lock.

Your PLAYMATE BALLMOWER 2.0 is now ready for use.
Thank you for your purchase.